

High Gain Wideband Antenna for WiMAX and Satellite Applications

Suryasevak Singh¹, Yamini M. Patil², Sukeshini S. Tabhane³

¹⁻³Lecturer, Department of Electronics & Telecommunication, Bharati Vidyapeeth Institute of Technology, Navi Mumbai, India

Abstract - Wireless technology is one of the main areas of research in the world of communication and a study of communication system is incomplete without understanding the operation of an antenna. Recent trends of wireless mobile communication technology are towards the miniaturization and demand for more robust and compact designs. This paper proposed a low cost, high gain and wideband rectangular patch antenna using PRS (Partially Reflecting Surface) layers. The antenna structure consist of microstrip antenna fabricated on a low cost substrate i.e air ($\epsilon_r = 1$) at 2mm. Constant high-gain and broad-band performance is obtained by resonating FPA patches different frequencies in 5.725–6.4GHz band, which covers 5.725–5.875GHz ISM band and 5.9–6.4GHz up-link C-band for satellite communication. The structure is optimized using Zealnd IE3D version 14.10. The optimized MSA provides a maximum gain of about 12 dBi with less than 1dBi gain variation over the operating frequency band, RL < - 9.5 dB, VSWR < 2, SLL < - 16dB, front to back ratio > 18 dB and efficiency > 80 %. The close similarity between simulation results and fabricated results has been observed. The proposed antenna is an attractive solution for WiMax and Satellite application.

Key Words: MSA, FR4, PRS, SSL, High gain, VSWR.

I. INTRODUCTION

Nowadays, due to their several key advantages over conventional wire and metallic antennas, Microstrip Antennas have been used for many applications, such as Direct Broadcasting Satellite (DBS) Systems, mobile communications, Global Positioning System and various radar systems. Their advantages include low profile, light weight, low cost, ease of fabrication and integration. [1] But Microstrip patch antennas also possess major disadvantages such as narrow impedance bandwidth, low efficiency and gain, which seriously limit the application of the Microstrip patch antennas. These limitations are due to the impedance mismatch of the feeding circuitry. In order to match the element the simplest matching method involves choosing the feed location where the resonant resistance is equal to feed-line impedance. In most application, the Microstrip patch antenna is fed using either coaxial probe feed or inset Microstrip line as both are direct contact methods providing high efficiency [2]. Generally, both the bandwidth and gain will increase with substrate thickness (up to certain limit), but decrease with increasing dielectric constant. One common method for bandwidth enhancement is using parasitic patches,

either in co-planar or stacked geometry. The gain can also be increased in co-planar geometry by placing the parasitic patches adjacent to fed patch to form an array [3]. The performance of Microstrip patch antennas greatly depends on substrate parameters i.e. their dielectric constant and tangent loss. Means that, the efficiency and gain are low when the dielectric constant and tangent loss are high [4] In designing a Microstrip Antenna, numerous substrates can be used to achieve good response [5]. Utilization of thick substrate with low dielectric constant is considered as a method of bandwidth enhancement technique [6]. Further to increase the efficiency and to decrease the high substrate loss, an air gap is inserted between radiating element and the ground plane. This air gap reduces both the electric field concentration on the lossy epoxy and the effective dielectric constant of the radiating plane. [7]. In comparison to a normal Microstrip patch antenna, antenna loaded with metamaterial structure has the capability to increase the gain and reduce the return loss as its dielectric constant reduces because of the structure [8]. Patch antennas are feasible for both on-body and off-body communication due to the low profile they utilized. The ground plane of such antenna effectively shields both the antenna (from the influence of the human body) and the user (from negative effects of electromagnetic field) [9]. The size, the patch and hence the patch array and also the integrability of the patch array with RF front end can be improved by using GaAs substrate and employing micro matching [10] By properly selecting the thickness of the substrate and the superstrate layers, a very large gain be realized using electromagnetic band gap (EBG). [11-12]. In this paper, instead of using a patch antenna with low-loss expensive dielectric materials such a Teflon or ceramic, a simple rectangular patch antenna with a standard low-cost FR4 is utilized by inserting an air gap between radiating element and ground plane to obtain a high gain and high efficiency. The method of feeding used is Probe feed technique, with the advantage that the feed can be placed at any place in the patch to match with its input impedance (usually 50 ohm).

II. ANTENNA GEOMETRY AND DESIGN THEORY WITH FINITE GROUND PLANE AND MODEL

The Microstrip patch Antenna is designed and optimised using a finite ground plane since there are various disadvantages using an infinite ground plane. The main advantage of using finite ground plane is that it is designed practically. It increases the gain and reduces the unwanted radiations. MSA is designed using FR4 material and air 4mm with Dielectric

constant (ϵ_r) 4.4, substrate thickness (h) 1.59mm, loss tangent 0.02. The design of double layer with air gap MSA has been calculated by using following equation below.

$$W = C\sqrt{(\epsilon_r + 1)/2} / 2f_0 \tag{2.1}$$

$$L = \frac{C}{2f_0\sqrt{\epsilon_r}} - 2\Delta L \tag{2.2}$$

$$\epsilon_e = \frac{\epsilon_{r1}h_1 + \epsilon_{r2}h_2}{h_1 + h_2} \tag{2.3}$$

$$\Delta L = \frac{0.412h[\epsilon_r + 0.300](W/h + 0.264)}{(\epsilon_r - 0.258)(W/h + 0.8)} \tag{2.4}$$

Where, ϵ_{r1} is the FR4 dielectric constant, ϵ_{r2} is the air gap dielectric constant, h_1 is the FR4 substrate thickness and h_2 is the air gap thickness. Afterwards, the patch width (W) and length (L) have been calculated by considering air gap thickness h_2 [7]. wideband rectangular patch antenna using PRS(Partially Reflecting Surface) layers fig 1.

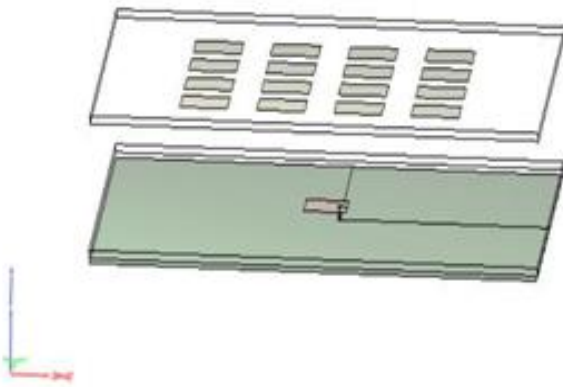


Fig.1. Rectangular patch antenna using PRS

Design of 4x4 here the length and width is varied for better results to obtain high gain and greater bandwidth. The length (L) is 14.2mm, width (W) is 16mm and feed point position 4.2mm.

III. SIMULATED RESULTS AND COMPARISONS

Return loss vs. frequency plot as shown in fig.2 The return loss (R.L) is parameter indicate the amount of power that is lost to load and does not return as a reflection. The structure is resonating at 5.78GHz

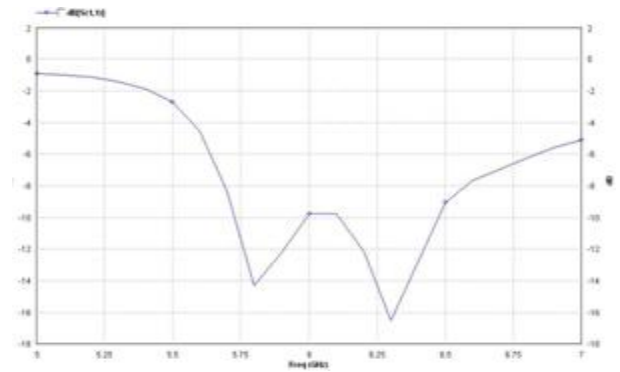


Fig 2 Return loss vs. Frequency

The antenna structure is optimized to obtain VSWR is less than 2 over the frequency range of 5.725–6.4GHz .The antenna provides 16.5 dBi gain with less than 1 dBi variation over 5.725–6.4GHz. .Gain variation of antenna is shown in fig.3

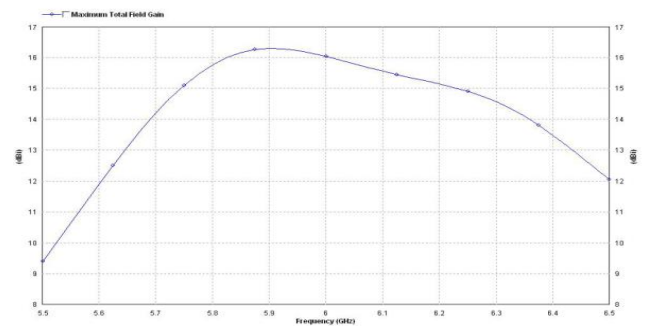


Fig.3.Total gain Vs Frequency

The impedance variation is shown in fig.4. The structure is capacitive for lower frequencies while inductive at higher frequencies.

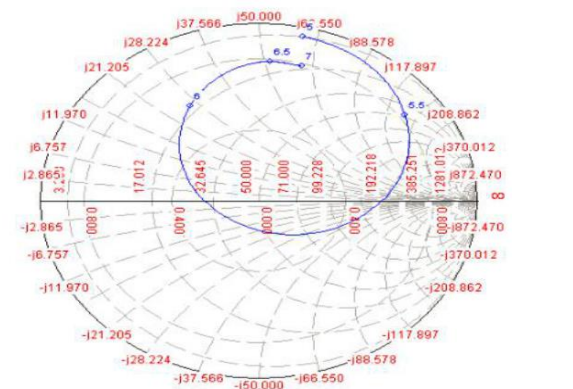


Fig.4. Smith chart

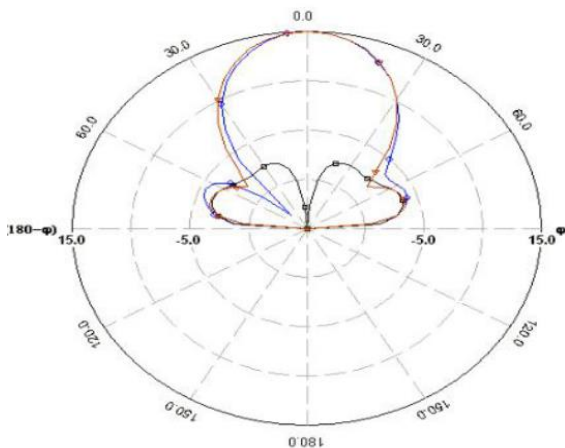


Fig.5. Antenna 2D Radiation Pattern

As shown in Fig.5. (Side Lobe Level) S.L.L < -17dB, (Front to back ratio) F/B > 18dB. The radiation pattern shows that the antenna radiates more power in a broadside direction and less in other direction. 3D Radiation pattern current density variation scale as shown in Fig.5.

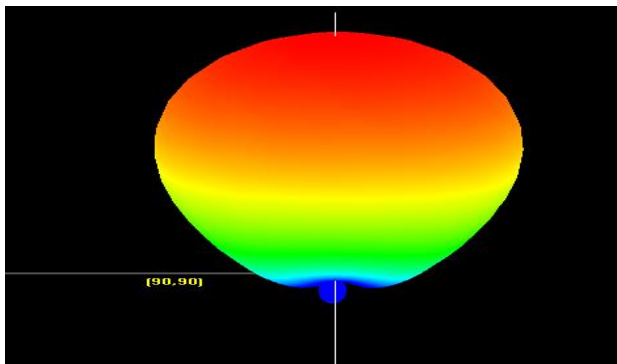



Fig. 6 Current Distribution

Side view of fabricated rectangular Microstrip patch antenna as shown in fig.7



Fig.7. Fabricated Antenna structure

The return loss of fabricated antenna as shown in Fig.8. The testing of antenna is done by using Network Analyzer.

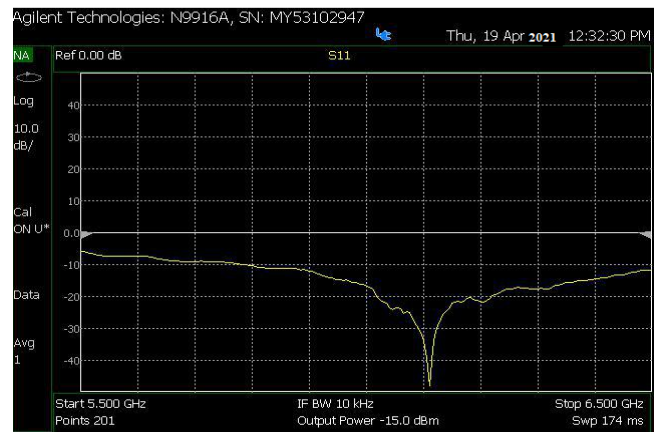


Fig.8. Return Loss of Fabricated Antenna

TABLE I

Antenna	Resonance Frequency (GHz)	Return Loss (dB)	VSWR	BW %
Simulated results	5.78GHz	-14.98	1.06	11.24
Fabricated results	5.78GHz	-16.09	1.31	10.03

IV. CONCLUSIONS

In this paper an attempt is made to optimise MSA using PRS (Partially Reflecting Surface) layers and successfully fabricated a low cost antenna using an easily available FR4 material. A single element Microstrip rectangular patch antenna with PRS is proposed to obtain high gain, wideband and efficiency and good agreements are observed in comparison with the fabricated and simulated results. The optimised structure provides a maximum gain of 10.6 dBi, efficiency > 80%, R.L < - 9.5dB, S.S.L < - 17dB and F / b > 18 dB and gain variation of less than 1dBi is obtained over 5.725–6.4GHz band, which covers 5.725–5.875GHz ISM band and 5.9–6.4GHz up-link C-band for satellite communication. Gain and efficiency can be further improved by using metamaterial.

REFERENCES

- [1] Meenal Kate & Anjana Goen, "Survey on Microstrip Patch Antenna for Dual Band WLAN Applications" Imperial Journal of Interdisciplinary Research (IJIR) Vol-2, Issue-10, 2016.
- [2] R. K. Gupta and J. Mukherjee, "Low cost efficient high gain antenna using array of parasitic patches on a

superstrate layer", Microwave Opt Technol Lett vol. 51, no.3, pp. 733-739, March 2009.

- [3] S. E Jasim, M. A. Jusoh, M. H. Mazwir and S. N. S. Mahmud, "Finding the best feeding point location of patch antenna using HFSS" VOL. 10, NO. 23, December 2015.
- [4] Bharath Kelothu and K.R. Shubashmi, " A Compact High-Gain Microstrip Patch Antenna For Dual Band WLAN Application" IEEE Transaction on Antenna and Wave Propagations 2012.
- [5] M.A.Matin et al, "Broadband Stacked Microstrip Antennas with Different Radiating Patch" Department of Electrical Engineering and Computer Science, North South University, Dhaka, Bangladesh 2009.
- [6] Avinash R. Vaidya, Jayanta Mukherjee and Sanjeev K. Mishra, "High-Gain Broad-Band Planar Antennas with Feed Patch Array and Partially Reflective Surfaces", The 19th Asia-Pacific Conference on Communications (APCC), Bali - Indonesia, 2013.
- [7] Indrasen Singh, Dr. V.S. Tripathi "Micro strip Patch Antenna and its Applications: a Survey", Indrasen Singh et al, Int. J. Comp. Tech. Appl., Vol 2 (5), 1595-1599
- [8] Sonal A. Patil and Dr. R K. Gupta. "Effect of small patches on gain of stacked high gain wide band antenna", International journal Emerging trends in Electrical & Electronics (IJETEE), Vol.2.Issue 3, April 2013.
- [9] Kadi rOzenc and M.EmireAydemir " Design of a 1.26 GHZ High Gain Microstrip Patch Antenna Using Double Layer with Airgap for Satellite Reconnaissance" 978-1-4673, 2013 IEEE.
- [10] N. Ab Wahab, Z. Bin Maslan, W.N.W. Muhamad, N. Hamzah, "Microstrip Rectangular 4x1 Patch Patch Array Antenna at 2.5GHz for WiMax Application," in Proc. Second Int. Conf. on Computational Intelligence, Communication Systems and Networks, pp.164-168, July 28-30, 2010