

An efficient approach to improve throughput for TCP vegas in ad hoc network

¹ Payal Vispute, Electronics and tele-communication , D.Y.Patil college of engg. Akurdi Pune, Maharashtra , India

² Sayali N. Mane, Electronics and tele-communication , D.Y.Patil college of engg. Akurdi Pune, Maharashtra , India

Abstract - The wireless communication Transmission Control Protocol (TCP) plays an important role in developing communication systems which provides better and reliable communication capabilities in almost all kinds of networking environment. Vegas is much better in performance as compare to other TCP variants like TCP reno and new Reno because of its packet delivery ratio and full use of packet transmission bandwidth. Some parameters like throughput and transmission delay plays a vital role in vegas performance. The purpose of this paper is to control congestion and improve performance of tcp vegas in mobile ad-hoc network (MANET). The simulation results show that vegas has higher throughput and lower delay of whole network and control congestion. Also, vegas has more capabilities of bandwidth estimation.

Keywords: TCP Vegas; ICA for TCP Vegas; Throughput model; Grey Predictor; Q-learning.

1. 1 INTRODUCTION

TCP vegas is known for its stable and brilliant congestion control capabilities. There are many competitive versions of TCP like Westwood plus, Reno but TCP vegas provides high throughput with minimum loss of packets. It is developed by Brakmo and Peterson in 1992. Vegas is more reliable protocol because it provides congestion control before collision in ad hoc networks.

In mobile ad hoc networks, vegas performs better at three aspects-

1. RTT (Round trip time) is prepared for the later prediction of throughput.
2. Vegas halve the congestion window (cwnd) size by identifying difference between expected throughput and actual throughput.
3. Vegas emphasize packet delay instead of packet loss by calculating transmission rate.

The simulation results show that the ICA for TCP has lower delay, higher throughput and more fair allocation of bandwidth in multi-hops ad hoc scenarios. The related work is shown in section 2. Section 3 introduces ICA (Improved Congestion Avoidance) for TCP vegas. Section 4 formulates the throughput model. Section 5 describes the grey predictor. Q-Learning is as shown in section 6. Section 7 shows obtained results. The article concludes in section 8.

2. LITERATURE REVIEW

F. U. Rashid, J. Singh, A. Panwar and M. Kumar [1] have achieved better output using TCP vegas. TCP vegas also provides large and effective results than other available competitive versions like Reno and New Reno. It has been proved that packet delivery ratio using TCP vegas is much better than other variants. M. Jehan, Dr. G. Radhamani and T. Kalakumari [2] have compared six different TCP standard congestion control algorithms namely BIC, cubic, TCP compound, vegas, reno and westwood congestion control algorithms. It is concluded that vegas provides impressive and desired results like throughput. Also, vegas is best suitable for small and active mobile ad hoc network.

K. Tsiknas and G. Stamatelos [3] have concentrated on the effect of suitable TCP variants on various adverse conditions of WiMax networks like link congestions, asymmetric end to end capabilities, wireless errors etc. G. Abed, M. Ismail and K. Jumari [4] have analyzed two parameters like alpha and beta which play an important role in improving vegas performance. [5] Markov Decision Process is formulated to determine TCP vegas performance. It also has been evaluated that segment loss probability plays a key role in a multi-hop scenario because of increased path length which leads to a significant increase of segment loss probability.

Z. H. Yuan, H. Venkataraman and G. Muntean [6] have proposed bandwidth estimation scheme which estimates the overall bandwidth for TCP traffic over

802.11WLANs. The proposed bandwidth estimation algorithm can also be extended for IEEE 802.11e and IEEE 802.11p. R. Belbachir, M. M. Zoulikha, A. Kies and B. Cousin [7] have illustrated a new technique namely “Accurate Bandwidth Reservation – ABR” for bandwidth reservation in MANET. ABR improves existing approach of bandwidth estimation techniques on wireless links.

C. Samios and M. Vernon [8] have proposed a simple and accurate model which is used to estimate the throughput of vegas as a function of packet loss rate, average round trip time, minimum observed round trip time and protocol parameters like alpha and beta. K. Srijith, L. Jacob and A. Ananda [9] have proposed a modification in TCP vegas. TCP vegas-A was performed better than TCP Reno in both wired and satellite networks. It overcome rerouting conditions in wired and fluctuating RTT in satellite networks and overcome bias against high bandwidth.

3. ICA FOR TCP VEGAS

Vegas only calculate the expected throughput by using round trip time of TCP layer. It cannot reflect the real throughput of whole network. Based on network situation of previous time step, vegas changes its congestion window. It gives idea of how to improve the whole network performance by future prediction of throughput.

ICA for TCP is a model which proposed to deal with the problem of real achievable throughput of whole network and online congestion control. Using difference (diff) between expected flow and actual flow, congestion window (cwnd) is adjusted. Initially value of alpha and beta is 1 and 3^[10].

$$diff = \frac{WindowSize}{baseRTT} - \frac{SentData}{ActualRTT} \tag{1}$$

$$cwnd = \begin{cases} cwnd + 1 & , diff < v_alpha \\ cwnd - 1 & , diff > v_beta \\ unchanged & , other \end{cases} \tag{2}$$

As shown in fig 1, ICA for TCP vegas has been proposed which has three enhanced views in congestion avoidance stages. Three views are throughput model, grey prediction model and q learning model. Throughput model calculates the theoretical throughput. Grey prediction

based on forward throughput prediction mechanism is used to promote the online cwnd control. Q-learning is applied to search more reasonable changing size of congestion window.

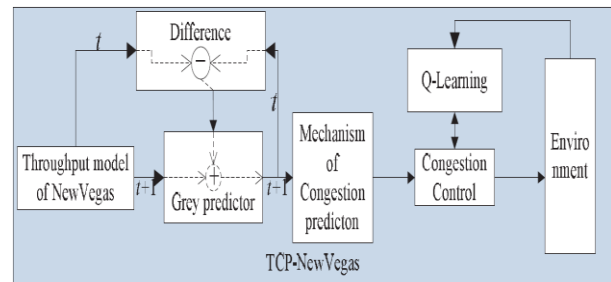


Fig 1 : ICA for TCP Model

4. THROUGHPUT MODEL

Throughput model^[10] concentrates on MAC sub layer. TCP throughput model is shown by equation (3) and (4).

In equation (3) and (4), P and CW_{peak} are Loss event rate and average peak size of congestion window respectively. P_{slr} and p_{TO} denote segment loss rate and probability of timeout respectively. RTO is first timeout of series timeout.

$$Th = \frac{\frac{1}{P} + \frac{A}{B}}{N * RTT + p_{TO} (C + D)} \tag{3}$$

where,

$$A = CW_{peak}^2 * P_{slr},$$

$$B = 1 + CW_{peak} * P_{slr},$$

$$C = (1 + 2p + 4p^2) * RTO,$$

$$D = (1 + \log \frac{CW_{peak}}{4}) * RTT.$$

$$N = \frac{CW_{peak} + 3}{2} + (1 - p_{TO}) \cdot (1 + CW_{peak} \cdot p_{str}) \quad (4)$$

For MAC layer, DCF (Distributed Coordination Function) with RTS and CTS is shown in figure (5) and parameters are shown in table (1).

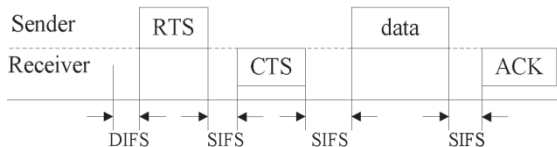


Figure 2 : DCF scheme

$$pt_{DCF} = DIFS + 3 \cdot SIFS + t_{RTS} + t_{CTS} + t_{macACK} \quad (5)$$

pt_{DCF}	Process time
dp_{DCF}	Delivery probability
ncdf	number of competition channel data flow
$D_{-}\tau$	probability of node requests to send data
BER	Bit error rate
DI	Packet size
dh	Length of packet header
CW_1	Initial size of cwnd

Table 1 : Parameters of MAC layer

The delivery probability, probability of node to send data and loss probability of one packet are given by equation (6), (7) and (8), respectively.

$$dp_{DCF} = (1 - D_{-}\tau)^{ncdf-1} \cdot (1 - BER)^{dl+dh} \quad (6)$$

$$D_{-}\tau = \frac{2}{CW_1 + 1} \quad (7)$$

$$lp_{dropDCF} = (a - dp_{DCF})^n \quad (8)$$

Another important way to control the congestion is queue management model. Assume for queue management model, RED (Random Early Discard) is used. Loss probability is as shown in equation (9). $queue_t^{\min}$ and $queue_t^{\max}$ are minimal and maximal size of queue in every congestion control stage at t time. $queue_t^{avg}$ indicates the average queue length at t+1 time.

$$lp_{queue} = \begin{cases} 0 & , queue_{t+1}^{avg} \leq queue_t^{\min} \\ 1 & , queue_{t+1}^{avg} \geq queue_t^{\min} \\ \frac{queue_{t+1}^{avg} - queue_t^{\min}}{queue_t^{\max} - queue_t^{\min}} & , \text{otherwise} \end{cases} \quad (9)$$

Round trip time and loss event rate are modified by considering MAC layer and queue management are calculated as^[10]

$$P = lp_{dropDCF} + lp_{queue} + lp_{TCP_ACK} \quad (10)$$

$$RTT = P + Q \quad (11)$$

Where,

$$P = (1 - lp_{dropDCF}) \cdot pt_{DCF} + (1 - lp_{queue}) \cdot pt_{queue}$$

$$Q = (1 - lp_{TCP_ACK}) \cdot pt_{TCP_ACK}$$

5. GREY PREDICTOR

Degree of data can be shown by the colors in grey theory model. As data increases, color gets deeper. The main purpose of grey theory is to predict output value for next time. Accumulated Generating Operation (AGO) is

used to maximize smoothness and minimize interference by reducing randomness and volatility of original data. Using AGO initial data are generated. The predicted value at t+1 is used to decide what action congestion window should take.

6. Q-LEARNING MODEL

When large data transmit under limited bandwidth and less delay then it is possible to send more packets and if more transmission time takes then there is a use of less bandwidth. It is important to manage bandwidth properly in the network and hence use vegas conditions.

To change congestion window, RTT depends on different values such as minimum RTT and maximum RTT at each congestion control change. The interval between minimum RTT and maximum RTT is the quantization of RTT. To improve quantization Markov Decision Model is best. Q-learning process is one of the Markov process.

7. SIMULATION RESULTS

Network Simulator 2 is used to simulate ICA for TCP. In the scenarios, 50 to 150 mobile nodes move in a 1000*1000 meter rectangular region. Normally channel capacity of mobile nodes for speed is 2Mbps but it may vary up to 4Mbps. Assume that all mobile nodes move independently with same speed. All nodes have transmission range is 250meters. Simulation time is 100 seconds.

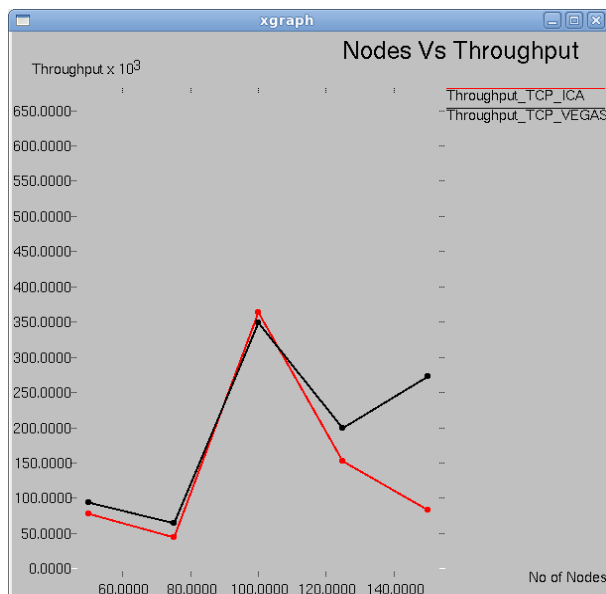


Fig 3: Simulation result for nodes vs throughput.

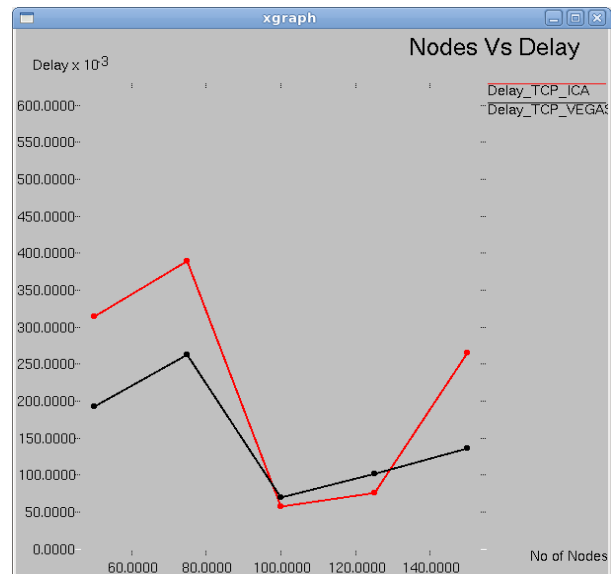


Fig 4: simulation result for nodes vs delay.

The simulation results for nodes vs throughput and nodes vs delay is as shown in figure (3) and (4) respectively. It shows that the throughput of ICA for TCP is not stable because of environmental awareness.

8. CONCLUSION

The study of TCP vegas and its parameters such as throughput, transmission delay is important in wireless ad hoc network. The conclusion is TCP vegas is an algorithm which provides impressive and desired results. TCP vegas uses throughput model to improve performance of the network and also it predicts throughput for next time which helps to adjust congestion window. It is also observed that NS2 simulation tool is the best way to illustrate and measure the performance of vegas in ad hoc network.

REFERENCES

[1] F. U. Rashid, J. Singh, A. Panwar and M. Kumar, "Congestion control analysis over wireless ad hoc networks", *International journal of engineering research and technology*, vol. 2, no. 5, pp. 462- 465, 2013.

[2] M. Jehan, Dr. G. Radhamani and T. Kalakumari, "Vegas: better performance than other TCP congestion control algorithms on manet", *International journal of computer networks(IJCN)*, vol. 3, no. 4, pp. 155-158, 2011.

- [3] K. Tsiknas and G. Stamatelos, "Performance evaluation of TCP in IEEE 802.16 networks", IEEE wireless communications and networking conference: mobile and wireless networks, vol. 2, no. 5, pp. 2951-2955, 2012.
- [4] G. Abed, M. Ismail and K. Jumari, "Influence of parameters variation of TCP Vegas in performance of congestion window over large bandwidth-delay networks", 17th Asia-pacific conference on communications, vol. 7, no. 2, pp. 434-438, 2011.
- [5] H. Xie, R. Pazzi and A. Boukerche, "A novel cross layer TCP optimization protocol over wireless networks by markov decision process", Wireless networking symposium conference, vol. 2, no. 5, pp. 5723-5728, 2012.
- [6] Z. H. Yuan, H. Venkataraman and G. Muntean, "A novel bandwidth estimation algorithm for IEEE 802.11 TCP data transmissions", International journal of computer science and information security, vol. 3, no. 1, pp. 377-382, 2012.
- [7] R. Belbachir, M. M. Zoulikha, A. Kies and B. Cousin, "Bandwidth reservation in mobile adhoc networks", IEEE wireless communication and networking conference: mobile and wireless networks, vol. 2, no. 1, pp. 2608-2613, 2012.
- [8] C. Samios and M. Vernon, "Modeling the Throughput of TCP Vegas", Sigmetrics pp. 664 – 668, 2003.
- [9] K. Srijith, L. Jacob and A. Ananda, "TCP Vegas-A: Improving the Performance of TCP Vegas", Communication and Internet Research Lab, pp. 429-440, 2003
- [10] Y. Luo, M. Yin, H. Jiang and S. Ma, "An improved congestion avoidance control model for TCP Vegas based on Ad Hoc networks", pp. 723-733, 2014.