

Defect Detection in Fabric using Image Processing Technique

Shalaka Subhash Patil¹, Dr. V. T. Gaikwad²

¹Student, Department of Electronics & Telecommunication, Sipna College of Engineering and Technology, Amravati, Maharashtra, India

²Professor, Department of Electronics & Telecommunication, Sipna College of Engineering and Technology, Amravati, Maharashtra, India

Abstract - We cannot imagine a world without textile. Quality control is an important feature in the textile industry. This paper proposes an approach to recognize fabric defects in textile industry for minimizing production cost and time since the work of inspectors is very tedious and consumes time and cost. Wastage reduction through accurate and early stage detection of defects in fabrics is also an important aspect of quality improvement. The investment in automated fabric defect detection is more than economical when reduction in labour cost and associated benefits are considered. The inspection of real fabric defects is particularly challenging due to the large number of fabric defect classes which are characterized by their vagueness and ambiguity. So this is the automated online detection of weaving defects by computerized system based on image processing technique software which is an effective and accurate approach to automatic defect detection.

Key Words: Image Processing, Defect detection, Quality Control, Fabric defect.

1. INTRODUCTION

Obviously fabric inspection has an importance to prevent the risk of delivering inferior quality product. Generally fabric defect is any abnormality in the Fabric that hinders its acceptability by the consumer. Fabric is produced with interlacement of warp and weft yarn or loop formation of yarn. Inefficiencies in industrial process are costly in terms of time, money and consumer satisfaction. The global economic pressures have gradually led business to ask more of it in order to become more competitive. As a result, intelligent visual inspection systems to ensure high quality of products in production lines are in increasing demand. Quality is an important aspect in the production of textile fabrics. Fabric quality is consisting of two components, i.e., fabric properties and fabric defects. Fabric property depends on the raw material, construction parameters and processing methods. Whereas a fabric defect can occur right from raw material selection to finishing stage, because of improper input parameters with respect to material, machine and man. Any variation to the knitting process needs to be investigated and corrected.

Image processing plays an important role in detection of fabric fault. Since images are defined over two dimensions. Digital image processing may be modelled in the form of multidimensional systems. Image processing is a method to

convert an image into digital form and perform some operations on it, in order to get an enhanced image or to extract some useful information from it. It is a type of signal dispensation in which input is image, like video frame or photograph and output may be image or characteristics associated with that image. Usually Image Processing system includes treating images as two dimensional signals while applying already set signal processing methods to them.

1.1 Background of Fabric Defect Inspection System

Around seven cover billion people are currently live on in the world and all the people use clothes to their bodies. Therefore, textile industry becomes very large and an important sector. Fabrics are the raw materials of textile industry and they have very sensitive structure. Consequently, quality is very important parameter for textile, so good quality products is a key issue for increasing rate of profit and customer satisfaction, as a result the industry's competitive edge is expanded in the global market [1]. If defects in the fabrics are not discovered before the garment manufacturing process, significant financial losses can adversely affects both dealers and manufacturers. For example, if damages in patterns of the fabric are, due to human absence, not discovered prior to manufacturing the fabric, as a result considerable loss of time, money and distrust between dealers and manufacturers can occur. In addition, defected fabrics lose 55 – 65% value against non-defected fabrics [1]. This is a very great loss for manufacturers. For this reason, the inspection of fabric defects is necessary and important for the textile industry.

1.2 Importance of fabric defect

Due to the increasing demand for quality fabrics, high quality requirements are today greater since customer has become more aware of poor quality problems. So quality is an important aspect in the production of textile fabrics.

To avoid Rejection of fabric, It is necessary to avoid defects. Price of fabric is reduced by 45%-65% due to the presence of defects. Company's reputation will go down. During manufacturing of fabric various types of defects occur in fabric among which some fabric defects are shown in the following figure



Fig -1: Various fabric defects

2. PROPOSED WORK

2.1 Automated Fabric Inspection

A fabric defect is any abnormality in the fabric that hinders its acceptability by the consumer. The textile processing does not eliminate variability incurred during different steps in textile manufacturing. As materials flow from one stage of processing to another, components of variability are added and the final product may involve a cumulative variability that is much higher than the variability of the input fibers and thus it cause a defect in the fabric. The main factors that lead to fabric defects are failure of opening and cleaning the machines that completely eliminate contaminants and trash particles, and it may leads to spinning, weaving and knitting related defects. So the fabric inspection has to identify all types of defects with minimum effort.

The wavelet transform provides a solid and unified mathematical framework for the analysis and characterization of an image at different scales. It provides both time and frequency information, and can be successfully applied for textile defect detection. Fabric defect detection based on wavelet transform performs better with less computation than the traditional statistical texture analysis approaches in identifying defects. Fault detection positioning and classification of the faults occur in the weaving machine during weaving by using the principle of image processing, an automatic fabric evaluation system, which enables computerized defect detection – analysis of weaved fabrics. Wastage reduction through accurate and early stage detection of defects in fabrics is an important aspect of quality improvement.

Automatic inspection systems are designed for increasing the precision, stability and speed with respect to Human Inspection Systems. Beside this, these automatic inspection systems provide high defect detection rates. Moreover, these systems also reduce labour costs, improve product quality

and increase manufacturing efficiency. Figure 2, consists the flow chart of an automated inspection system.

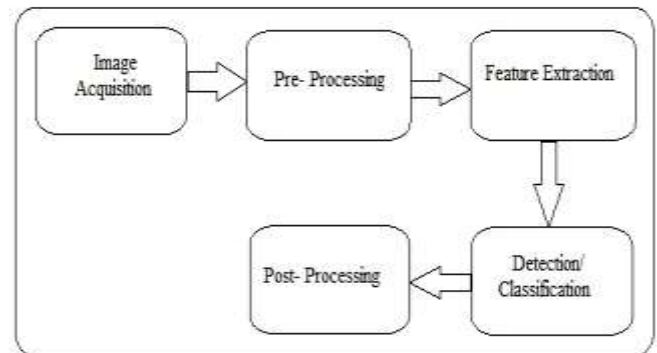


Fig -2: Automated fabric inspection system

1) Image Acquisition

A line scan camera uses linear array photo sensors systems, so linear array photo sensors systems provides a higher resolution and can inspect a larger portion of an inspected product. The system has to be used to synchronize the camera scan rate with the transport velocity of the product.

2) Pre-processing

Pre-processing part is used to obtain useful information from captured fabric images by feature extraction techniques. Although fabric images are captured in high resolution, the images also include noises and other distortion.

3) Feature Extraction

The aim of feature extraction is to obtain useful information from an image. In the case of fabric defect detection, defected and non-defected texture are characterized and analysed. Features are very importance to most fabric defect detection systems because they possess a close relationship to the detection accuracy of the fabric defect detection method.

4) Detection /Classification

This part actually works like the fabric defect detector. In detection and classification section feature vectors are used to determine and classify the patterns to classes. In the detection of fabrics, since there are two classes considered: the normal fabric and the fabric defects.

5) Post-processing

Fabric defect identification is complete in detecting and classification process. The faults may lead to give incorrect decisions that cause disposal of more fabric and extra cost may occur on the manufacturing process to reduce the risk, a post-processor is needed after the detection phase.

2.2 Wavelet Transform

Nowadays, wavelet transformation is one of the most popular candidates for the time-frequency-transformations. In conventional Fourier transform, we use sinusoids for basic functions. It can only provide the frequency information. Temporal information is lost in this transformation process. Conventional Fourier transform, wavelet transforms are based on small waves, called wavelets.

The wavelet analysis method is a time-frequency analysis method which selects the appropriate frequency band adaptively based on the characteristics of the signal. Then the frequency band matches the spectrum which improves the time-frequency resolution. The wavelet analysis method has an obvious effect on the removal of noise in the signal.

There are many members in the wavelet family, a few of them that are generally found to be more useful as Haar Wavelet, Daubechies wavelets, Coiflets, Symlets, Mayer Wavelet out of which Haar Wavelet is discussed below:

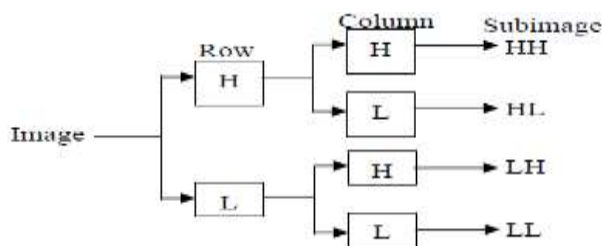


Fig -3: Tree Wavelet Decomposition of an image into four sub images

Haar wavelet is one of the oldest and simplest wavelet. Therefore, any discussion of wavelets starts with haar wavelet. In mathematics, the Haar wavelet is a sequence of rescaled "square-shaped" functions which together form a wavelet family or basis. The technical disadvantage of the Haar wavelet is that it is not continuous and therefore not differentiable.

3. CONCLUSIONS

Textile industry is growing with a large momentum and there are many obstacles to reduce the profit. The manufacturers also deal with quality issues to increase their profit rates. The manual inspections systems reduce the quality of fabrics because of the human limited physiological nature. The interests to Fabric Defect Detection Systems (FDDS) are increasing day by day. The aim of our research is to design a high quality defect detection system. Fabrics are formed by thread groups that periodically woven.

The resolution and the illumination are very important factors in fabric inspection systems. The resolution of fabrics directly affects the result of fabric inspection system. It is relatively hard to get true features from low resolution and unclear fabric images. In such case the characteristic of the

fabrics disappear, so it becomes difficult for the inspection systems to decide the defected regions.

So to minimize the loss due to verity of defect occurring in the fabric, a manufacturer should try to minimize those defects by using automated systems like fabric fault detection. This system will be useful for the manufacturers as it will inform about the faulty fabric in advance. It will save the time and energy of manually testing the fabric quality.

REFERENCES

- [1] Gonzalez R. C., & Woods R. E. (2002). Digital Image Processing, 2nd Ed. Upper Saddle River, N.J.
- [2] Chen J., & Jain A. K. (1988). A structural approach to identify defects in textured images, Proceeding of IEEE International Conference on System, Man, and Cybernetics, 29-32.
- [3] Mahure, Jagruti, and Y. C. Kulkarni. "Fabric faults processing: perfections and imperfections." International Journal of Computer Networking, Wireless and Mobile Communications (IJCNWMC) 1.4 (2014): 101-106.
- [4] Haralick R. M., Shanmugam K., & Dinstein I. (1973). Textural Features for Image Classification, IEEE Transaction on System, Man and Cybernetics, 6, 610-621.
- [5] Chellappa R., & Chatterjee S. (1985). Classification of Textures Using Gaussian Markov Random Fields, IEEE Transactions on Acoustics, Speech and Signal Processing, 33, 959-963.
- [6] Randen T. (1997). Filter and Filter Bank Design for Image Texture Recognition. Ph.D. Thesis, Norwegian University of Science and Technology.
- [7] Baykut A., Ozdemir S., Meylani R., Ercil A., & Ertuzun A. (1998). Comparative Evaluation of Texture Analysis Algorithms for Defect Inspection of Textile Products. Proceedings of the 14th International Conference on Pattern Recognition (2), 1738-1741.
- [8] Ade F, Lins N., & Unser M. (1984). Comparison of various filters sets for defect detection in textiles. Proceedings of 7th International Conference in Pattern Recognition, 428-431.
- [9] Fazekas Z., Komuves J, Renyi I., & Surjan L. (1999). Automatic Visual Assessment of Fabric Quality, Proceedings of IEEE International Symposium on Industrial Electronics, 1, 178-182.