

SEISMIC ANALYSIS AND DESIGN OF MULTISTOREY BUILDING IN DIFFERENT SEISMIC ZONES BY USING ETABS

P. Siva sai¹, B. Reshma², M. Sai krishna³, P. Siva nagaraju⁴, K. Venkata sai⁵, Mr. V. Nagaraju⁶

1, 2, 3, 4,5 B. Tech Department of Civil Engineering, Dhanekula Institute of Engineering & Technology

6, Assistant Professors Department of Civil Engineering, Dhanekula Institute of Engineering & Technology

Abstract - In India, multi-storied buildings area unit sometimes created because of high value and deficiency of land. Earthquake could be a phenomenon which might generate the foremost harmful forces on structures. Buildings ought to be created safe for lives by correct style and particularisation of structural members so as to possess a ductile sort of failure. The thought of earthquake resistant style is that the building ought to be designed to resist the forces, that arises because of style Basis. With the advent of advanced technology, civil structures such as high-rise buildings are designed with increased flexibility, increasing their susceptibility to external excitation. Therefore, these structures area unit prone to excessive modes of vibration underneath the impact of a powerful wind and earthquake. To protect such civil structures from significant structural damage, the seismic response of these structures is analyzed along with wind force calculation and forces such as support reactions and joint displacement are calculated and included in the structural design for a vibration resistant structure. The primary objective is to make associate earthquake resistant structure by enterprise seismal study of the structure by static equivalent methodology of study and do the analysis and design of the building by using E-TABS software in both static and dynamic analysis. For this purpose, a G+10 residential building plan is considered. Seismic calculations are conducted for earthquake zone II, III, IV and V. The structural safety of the building is ensured by calculating all acting loads on the structure, including the lateral loads caused due to wind and seismic excitation.

Key Words: Base shear, displacement, story shear, story drift

1.INTRODUCTION

1.1 EARTHQUAKE RESISTANT STRUCTURES

1.2 EARTHQUAKE ZONES OF INDIA:

The earthquake zoning map of India divides India into 4 seismic zones (Zone 2, 3, 4 and 5) unlike its previous version, which consisted of five or six zones for the country. According to this partitioning map, Zone five expects the best level of seismicity whereas Zone a pair of is related to the bottom level of seismicity. Each zone indicates the results of Associate in Nursing earthquake at a specific place supported the observations of the affected areas and may even be represented employing a descriptive scale like Medvedev-Sponheuer-Karnik scale, could be a macro unstable intensity scale wont to valuate the severity of ground shaking on the idea of discovered effects in a part of the earthquake occurrence.

ZONE 5: Zone 5 covers the areas with the highest risks zone that suffers earthquakes of intensity MSK IX (Destructive) or greater. The IS code assigns zone issue of zero.36 for Zone 5. Structural styleers use this issue for earthquake resistant design of structures in Zone five. The zone issue of zero.36 is indicative of effective (zero periods) level earthquake in this zone. It is mentioned because the terribly High injury Risk Zone.

ZONE 4: This zone is called the High Damage Risk Zone and covers areas liable to MSK VIII (Damaging). The IS code assigns zone factor of 0.24 for Zone 4 at Jammu and Kashmir, Himachal Pradesh, Uttarakhand.

ZONE 3: This zone is classified as Moderate Damage Risk Zone which is liable to MSK VII (very strong). And The IS code assigns zone factor of 0.16 for Zone 3.

ZONE 2: This region is liable to MSK VI (strong) or less and is classified as the Low Damage Risk Zone. The IS code assigns zone factor of 0.10.

Fig 1.1 seismic zones at different areas in India

In this project, we are going to compare base shear, displacement, drift at different seismic zones by static and dynamic analysis.

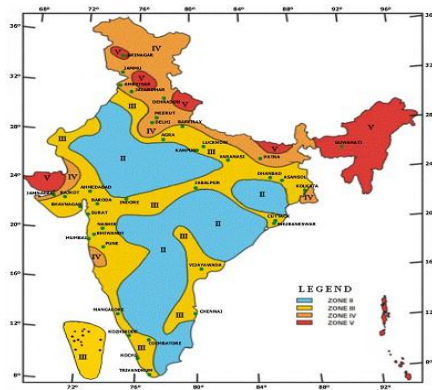


Fig 1.1 seismic zones at different areas in India

1.3 WIND

Wind could be a perceptible natural motion of air relative to earth surface, particularly within the sort of current of air processing in a very explicit direction. Wind blows with less speed in rough piece of ground and better speed in swish piece of ground. Terrain during which a particular structure stands shall be assessed as being one in all the subsequent piece of ground categories-

Category 1-Exposed open terrain with few or no obstructions and in which the average height of any object surrounding the structure is less than 3mts.

Category 2- Open terrain with well scattered obstructions having heights generally between 3mts to 10mts.

Category 3-Terrain with varied closely spaced obstructions having a size of building structures up to 10mts height with or while not a number of isolated tall structures.

Category 4 -Terrain with numerous large heights closely spaced obstructions.

1.4 SEISMIC ANALYSIS OF STRUCTURES

The seismic analysis ought to be dispensed for the buildings that have lack of resistance to earthquake forces. Seismic analysis can take into account dynamic effects thence the precise analysis typically become complicated. However, for simple regular structures equivalent linear static analysis is sufficient one, this type of analysis is carried out for regular and low-rise buildings. Seismic analysis of multi-storey building will be carried out for the building as specified by the code IS 1893-2002 (part 1). Dynamic analysis carried out either by response spectrum method or time history analysis method. The different analysis procedures are:-

- i. Linear Static Analysis
- ii. Linear Dynamic Analysis
- iii. Non-Linear Static Analysis
- iv. Non-Linear Dynamic Analysis

1.5 OBJECTIVES OF THE STUDY

The objective of the present work is to study the seismic analysis and design of a multi-storeyed building(G+10) asymmetrical in plan, under earthquake load by adopting static analysis method to evaluate storey drift and displacements and other comparisons at zone II, III, IV and V.


Analysis of structure using static method and finding out maximum bending moment, drift at support, base shear, stiffness and shear force to understand the basic principles of structures by using Indian Standard Codes to understand

the parameters of the design for beams, columns, slabs and other structural components to prepare the 3D model of the structure by using the E-TABS Software for detailed analysis and design how the seismic evaluation of a building should be carried out to study the behaviour of a building under the action of seismic loads and wind loads to compare various analysis results of building under zone II, III, IV and V using ETABS Software.

1.6 SCOPE OF THE STUDY

Based on project, study was undertaken with a view to determine the extent of possible changes in the seismic behaviour of multi-storey Building Model. The study highlights the effect of seismic zone factor in different zones that is in Zone II, III, IV and V which is considered in the seismic performance evaluation of buildings. The study emphasis and discusses the effect of seismic zone factor on the seismic performance of G+10 building structure. The entire process of modelling, analysis and design of all the primary elements for all the models are carried by using ETABS 15 version software.

METHODOLOGY:

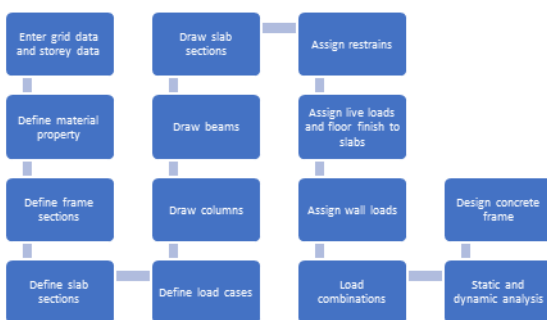

2 SPECIFICATIONS OF A BUILDING:


2.1 DEVELOPMENT OF PLAN IN AUTOCAD



2.2 BUILDING PROPERTIES

Particulars	VALUES	Particulars	VALUES
Type of building	Multi-storey building	Size of Columns	650 X 900 mm, 500 X 600 mm, 450 mm X 450 mm
Plan dimension	11.5 m X 10.6 m	Thickness of slab	120 mm
Total height of building	33m	Thickness of walls	300mm
Height of each storey	3m	Seismic Zone	V, IV, III, II
Size of beams	350 X 600 mm, 250 mm X 300 mm	Soil Condition	Type III
concrete grade	M30, M40	Built-up area	800 sq.m

Model generated in ETABS window:-

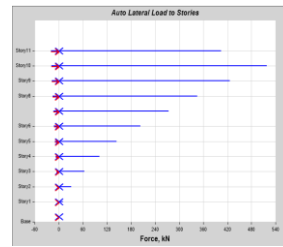

ZONE-II (X) Fig 9.1 lateral load at Zone 2(X) by Static Analysis

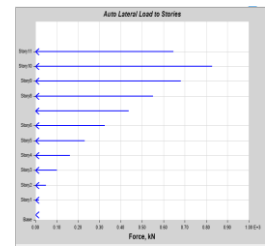


Fig 9.3 lateral Load at Zone 3(X) by Static Analysis

ZONE-IV (X)

ZONE-V(X)

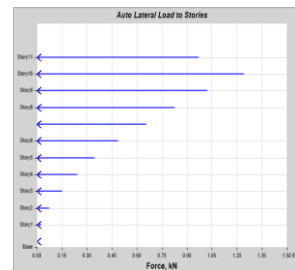


Fig 9.5 Lateral load at Zone 4 (X) by Static Analysis

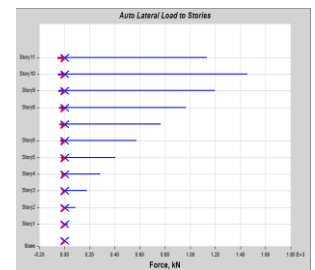


Fig 9.7 Lateral Load at Zone 5 (X) by Static Analysis

STATIC ANALYSIS RESULTS

Lateral forces(kN) to stories for different seismic zones

Zone	II		III		IV		V	
	X	Y	X	Y	X	Y	X	Y
11	403.8	0	646.20	0	1134.6	0	969.3	0
10	518.1	0	829.01	0	1455.5	0	1243.5	0
09	425.8	0	681.43	0	1196.4	0	1022.1	0
07	273.4	0	437.45	0	768.09	0	656.18	0
05	144.3	0	230.92	0	405.32	0	346.38	0
03	63.42	0	101.47	0	178.17	0	152.21	0
01	10.14	0	16.236	0	28.50	0	24.354	0
Plinth	0.230	0	0.3689	0	0.64	0	0.5533	0
Base	0	0	0	0	0	0	0	0

Table 9.1 Lateral Forces in Different Seismic Zones by Static Analysis

Graphs of lateral forces in various seismic zones in X and Y directions

Storey Displacement(mm) at different seismic zones

Zone	II		III		IV		V	
	X	Y	X	Y	X	Y	X	Y
11	23.2	26.8	37	42.4	55.3	6	64.7	71
10	22.4	25.6	35.7	40.6	53.3	6	62.4	68.1
07	16.7	18.8	26.6	29.9	39.9	4	46.6	50.2
05	12	13.4	19.1	21.2	28.7	3	33.5	35.7
03	7.2	7.9	11.5	12.6	17.2	1	20.8	21.2

02	4.9	5.4	7.9	8.6	11.8	1	13.9	14.5
Base	0	0	0	0	0	0	0	0

Table 9.2 Displacement in Different seismic zones by Static Analysis

Graphs of Displacement in various seismic zones by static analysis

ZONE-II




Fig 9.9 Displacement at Zone 2 by Static Analysis

ZONE-III




Fig 9.10 Displacement at Zone 3 by Static Analysis

ZONE-IV




Fig 9.11 Displacement at zone 4 by Static Analysis

ZONE-V




Fig 9.12 Displacement at zone 5 by Static Analysis

ii.Storey Drift for different seismic zones

Zones	II		III		IV		V	
	X	Y	X	Y	X	Y	X	Y
11	0.0028	0.00038	0.00044	0.00059	0.00066	0.00086	0.00098	0.00127
	0.00	0.00			0.00	0.00	0.00	0.00

08	066	079	0.00106	0.00124	158	184	236	275
05	0.00085	0.00097	0.00136	0.00154	0.00204	0.00230	0.00306	0.00344
03	0.00074	0.00083	0.00119	0.00132	0.00178	0.00198	0.00267	0.00296
Base	0	0	0	0	0	0	0	0

Table 9.3 Storey Drift values in Different Seismic Zones by Static Analysis

Graphs of Storey Drifts in various seismic zones

ZONE-II

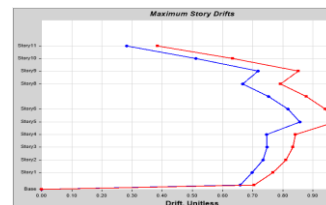


Fig 9.13 Storey Drift at zone 2 by Static Analysis

ZONE-III




Fig 9.14 Storey Drift at zone 3 by Static Analysis

ZONE-IV




Fig 9.15 Storey Drift in Zone 4 by Static Analysis

ZONE-V




Fig 9.16 Storey Drift in Zone 5 by Static Analysis

CONCLUSIONS:

1. From Static Analysis the base shear of structure increases as we go to higher seismic zones. For a similar building the

base shear value of ZONE II is 2519.99 KN and ZONE V is 9071.99 KN. This means base shear increases by more than 27.7% if seismic ZONE changes from II to V.

2. From Static Analysis the displacement of building models increases with the increasing of seismic Zones. The displacement is very high at roof and very low at the base. The displacement occur at the ZONE II is 23.2 mm and ZONE V is 64.7 mm. This means base shear increases by more than 27% if seismic ZONE changes from II to V.

3. The displacement of building models increases with the increasing of wind pressure. The displacement is very high at roof and very low at the base. The displacement occurs at the wind space 39 m/s is 9.7 mm and at the wind speed 44m/s is 12.2 mm. This means the displacement is increases by more than 79.5% from wind speed 39 m/s to 44m/s.

4. From the Static Analysis the storey drift is mainly occurred at the middle of the building structure. From table 9.3 and fig 9.13 to 9.16, it is concluded that the storey drift increases with the increasing of seismic zone factor and the maximum storey drift is available at ZONE V for the max. Load combo at 5th floor. The storey drift for ZONE II is 0.00097 and storey drift for ZONE V is 0.00344 at 5th floor. This means the storey drift is increases by more than 50% when compare to ZONE II to ZONE V.

5 .In Static Analysis from results it is observed that the Storey Shear is decreased as height of the building increased and reduced at top floor in all the building models subjected to seismic loads considered. The storey shear is maximum at the base and the storey shear value for the model in ZONE II is 3779 kN and ZONE V is 10619 kN. This means the storey shear is increases by more than 35% when compare to ZONE II to ZONE V.

REFERENCES:

[1].K.R ,Bhavani Shankar , Rakshith Gowda (2014) .”Seismic Analysis for Comparison of Regular And Vertically irregular RC Building with soft storey at

different levels”.(IJETE) International journal of emerging Technologies and Engineering. Volume 1 issue 6 .

[2]. Nonika.N ,Mrs.GargiDanda De . “Comparision on seismic Analysis of Regular And Vertical Irregular Multistoried Building “. (IJRASET) International Journal of Research in Applied Science and Engineering Technology. Volume 3 Issue VII , July 2015.

[3]. Arvindreddy.R.J. Fernades. “ Seismic analysis for the RC Regular and Irregular frame structures”. International Research journal of Engineering and Technology (IRJET)

[4]. Prashanth.P. Anshuman.S. Pandey .R.K. Arpan Herbert. “ Comparision of design Results of a structure designed using STAAD and ETABS software's”. International journal of civil and structural Engineering. Volume 2 , No.3 2012 Research Article.

[5]. HimanshuGaur , R.K. Goliya , Krishna Murari, Dr.A.K.Mullikh. “ A Parametric Study on Multi-storey R\C Buildings with Horizontal Irregularity”. IJRET Volume:03 . Issue: 04|April 2014.

[6] Juned Raheem , Dileshwar Rana, Prof. (2015) Seismic Analysis of Vertical & Regular Geometric Irregular RCC Framed Buildings.

[7] Aainawala M. S., Pajgade P. S. . “Design of Multistoried R.C.C. Buildings with or without Shear Walls”, International Journal Of Engineering Sciences & research Technology. ISSN: 2277-9655, Vol.7, No. 3, pp. [498-510].2014

[8] Al-Ali, A.A.K. and Krawinkler, . “Effects of Vertical Irregularities and horizontal irregularities on Seismic Behaviour of Building Structures”, Report No. 130, The John A. Blume Earthq